

# ARMORPLATE™





# INTRODUCING THE ARMORPLATE™ DOOR

## THE STRENGTH OF A STEEL COMPOSITE SANDWICH PANEL.

Tough and attractive, TODCO's ArmorPlate™ overhead door is designed for heavy freight trailer and truck body applications.

ArmorPlate incorporates proven technology in its strong, straight-forward panel design. The panels are 13mm thick, consisting of high-strength steel skins bonded to a solid high density polyethylene composite core. The steel skins have the durability to stand up to heavy freight, frequent stops and unforgiving highway conditions. The polycomposite core is impervious to moisture, while providing additional strength.

This extra-strong door has an excellent strength-to-weight ratio. In fact, an ArmorPlate door weighs in at about the same as a one-inch plywood door. But it's thinner, stronger and more weather resistant.

TODCO ArmorPlate doors are available in paint to match, or pre-painted coil to fleet specifications. Standard MagniCoat™ rivets protect against rust, without the extra cost of e-coating.


Get all the facts about the TODCO door that combines the best of strength and performance for the long haul, the ArmorPlate Door.



1332 Fairground Road East  
Marion, Ohio 43302  
(740) 383-6376

**NOT JUST TOUGH...TODCO-TOUGH.**

[www.todco.com](http://www.todco.com)

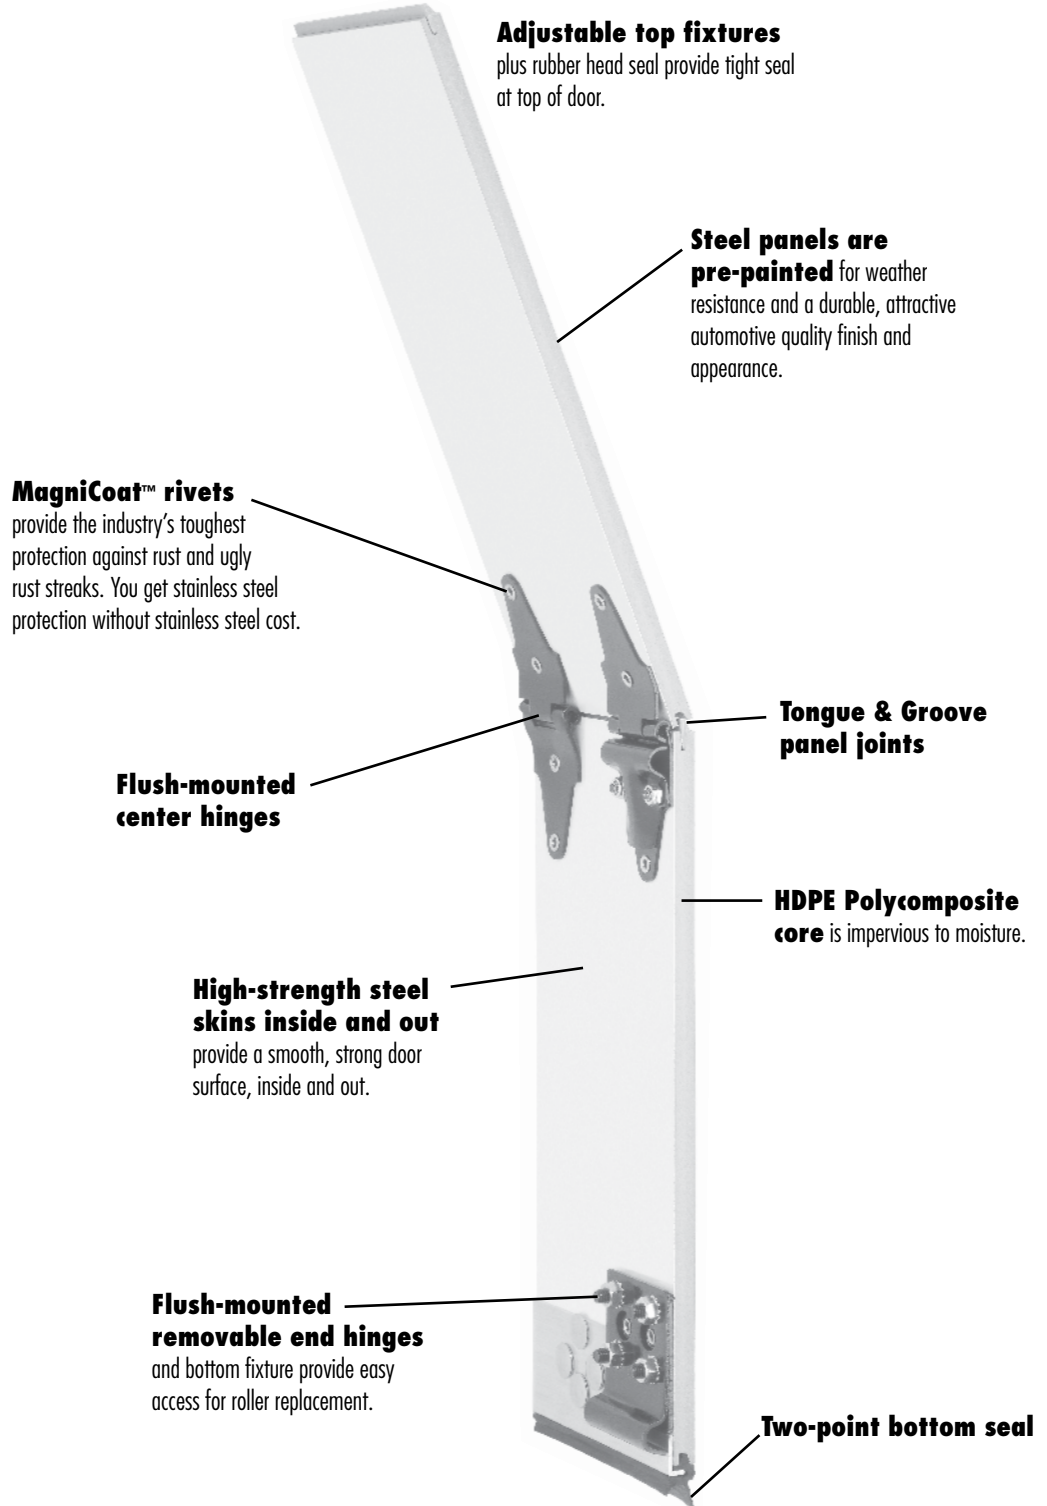

**Adjustable top fixtures**  
plus rubber head seal provide tight seal at top of door.

**Steel panels are pre-painted** for weather resistance and a durable, attractive automotive quality finish and appearance.

**MagniCoat™ rivets**  
provide the industry's toughest protection against rust and ugly rust streaks. You get stainless steel protection without stainless steel cost.

**Flush-mounted center hinges**

**Tongue & Groove panel joints**

**HDPE Polycomposite core** is impervious to moisture.

**High-strength steel skins inside and out**  
provide a smooth, strong door surface, inside and out.

**Flush-mounted removable end hinges**  
and bottom fixture provide easy access for roller replacement.

**Two-point bottom seal**

ArmorPlate™ doors can be retrofitted into existing 1" or 2" track dryfreight configurations, with either a single or dual spring counterbalance.

For new orders and order inquiries, fax 1-800-24-TODCO (1-800-248-6326). TODCO reserves the right to change product specifications at any time without notice.