

Save Installation Time & Money with

EZ SEAL™

TODCO's New Dual Durometer PVC Side Seal

Reduce seal installation time by **50%** at no additional cost!

- No stretching required
- Reduces drag on door vs. rubber seals
- Cut with any standard hand or power saw




Part #70531.3360
Standard Lip EZ Seal™ - 105"

Part #70532.3360
Long Lip EZ Seal™ - 105"

Part #70533.3360
Dual Lip EZ Seal™ - 105"

EZ Seal™ Installation

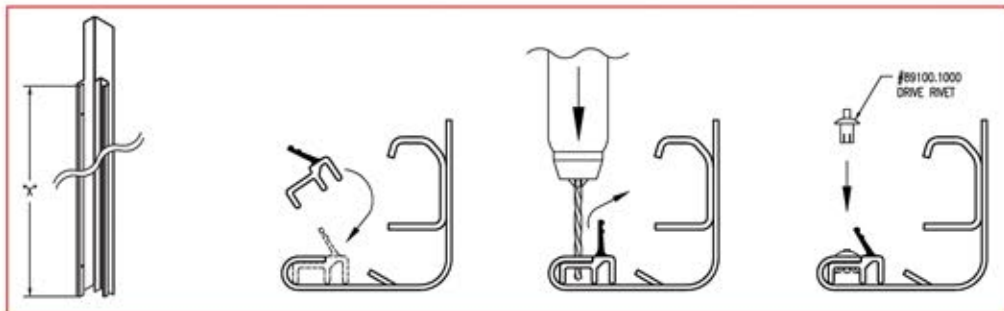

Step 1
Measure Retainer Length "X"
Cut Seal to Match

Step 2
Insert Seal into Retaining Lip
Full Length

Step 3
Push Back Flexible Portion of
Seal and Drill Mounting Holes Approx.
3" from Top, 3" from Bottom and
Every 36" to 48" on Center
thru Retainer and Seal - .203 Diameter

Step 4
Insert and Set
Drive Rivet (89100.1000)
in Holes Drilled in Step 3



phone: 740-383-6376 • toll free: 800-999-3392
visit us at www.todco.com

