



DRYFREIGHT DOOR



TODCO®

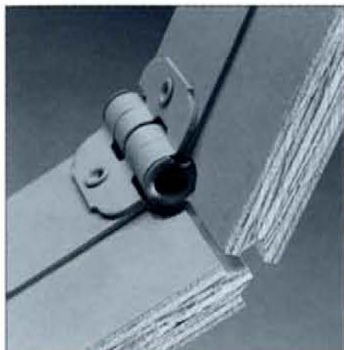

▲ **Four-knuckled hinge for long life, smooth operation.** Knuckles recessed into door panels to prevent freight hang-up and possible door damage. TODCO's innovative, four-knuckled design creates a smoother axis for the panels to rotate on. Less play results in longer hinge and panel life, and easier operation.



◀ **Seals lock out dirt and moisture.** Standard top and bottom seals protect cargo and cargo bay. Optional side seals also available.



◀ **1" and 2" track with multiple roller options.** TODCO's dryfreight door is designed, engineered and proven to provide thousands of miles of long-lasting, trouble-free performance.



◀ **Transportation Core sets industry standard for durability and performance.** 3/4", 7-ply, medium-density overlay plywood panels stand up to the road's worst punishment, mile after mile. Outer hardwood veneer virtually eliminates wood grain "telegraphing". Inner layers adhered together to increase moisture resistance. Panels have interlocking tongue and groove joint construction and recessed knuckle hinges. Doors are prime-painted with optional finish colors available. Panels can also be pre-painted white or gray.

▶ **Aircraft quality 7x19 stainless steel cables.** 7x19 cable consists of seven individual cables, each constructed of 19 separate strands of stainless steel, interwoven for strength and flexibility. Superior corrosion resistance outperforms galvanized.



◀ **Single and dual counterbalance spring options for effortless operation.** Calibrated to door's overall weight and size for smooth, easy motion, time after time.

▼ **Self-adjusting lock designed for long life.** TODCO's maximum security lock never needs adjusting. No springs to rust, wear, bind or break. Several options available.





OPTIONS & ACCESSORIES

TODCO OVERHEAD DOORS

- 1/4" ArmorPlate
- 3/8" ArmorPlate
- 1/2" ArmorPlate
- 3/4" ToughShell
- 3/4" WeatherTite

EXTRUDED ALUMINUM

- FleetStar Double Wall
- CityCargo Single Wall
- Roll-up Shutter Door

INSULATED FIBERGLASS

- 1-1/8" TODCOLD
- 2-1/2" TODCOLD

LOCKS & LOCK OPTIONS

Standard Maximum Security Lock — Self-adjusting, with no springs to rust, wear, bind or break. Standard on all doors.

Automatic locking option available — built-in cylinder automatically locks when shut.



Optional "Life Guard" Maximum Security Lock — Can be opened from the inside, even when padlocked, protecting personnel from being locked inside.



Optional Single- and Two-Point Slam Locks With Inside Release — Used on bakery units, side doors, parcel delivery, etc. Available with several handle options.



ACCESSORIES

1" Sealed Rollers — Pre-lubricated and sealed.




2" Rollers — Plastic or steel.



Rubber Side Seals — For weather-tight protection.




Brush Side Seals — Weather protection with less drag for easier door opening/closing.




Dual Lip Side Seals — Straddles end hinge rivet heads for extra protection against dirt and moisture.




Head Seal — Premounted on top panel.



Heavy-Duty Bottom Seal — Four lips for increased weather protection.




Load Bar — Protects door from unsecured cart damage.




Safety Chains — Rugged, steel castings and case hardened steel chain provide double security protection.



Heavy-Duty, Rust-Free Aluminum Forklift Plate — Helps prevent forklift damage.




Pull Straps — Various styles and lengths available.



Padlock keeper — Prevents loss of padlock.




Removable Roller End Hinges — For ease of roller replacement.




Maximum Strength Hinges — Heavy duty for longer life.



Reinforcement Straps — Add strength to panel(s) to help prevent cargo shifting damage.



Aluminum Polar Vents — Open and close for air circulation.



1332 Fairground Road East
Marion, Ohio 43302
(740) 383-6376

HOT JUST TOUGH...TODCO-TOUGH.
www.todco.com

TODCO reserves the right to change product specifications at any time without notice.
© 2024 TODCO. All rights reserved.